
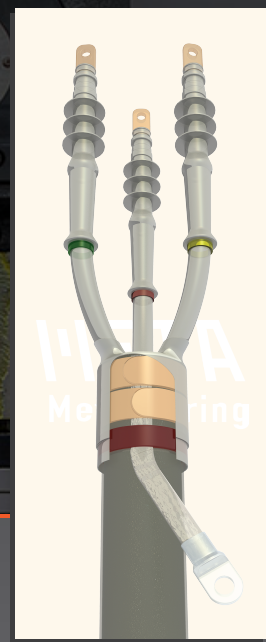


Cable Clamp Constant Force Spring Cable Clamp Roll Spring

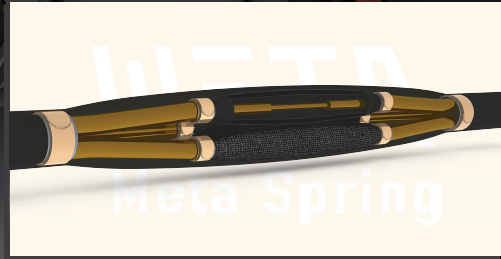

Material Specification:

Stainless Steel 1.4310 (X10CrNi18-8)

Part No.	Series	Product Dimensions			Application Range	
		Spring Width	Inner Diameter	Spring Tape Length	Minimum Diameter	Maximum Diameter
		(mm)	(mm)	(mm)	(mm)	(mm)
A1	4-10	6.1	4	85	4	10
A2		16	4.3	100	6	10
A3		16	4	230	4	10
A4		16	4	300	4	10
B1	7-14	16	7	230	8	13
B2		10	7.5	175	9	15
B3		16	6.8	225	9	14
B4		16	6.8	225	9	14
B5		10	7	150	7	12
B6		10	9	190	9	14
C1	12-22	19	11.5	280	12	19
C2		16	11	328	13	22
C3		16	11	225	14	22
C4		16	10.5	222	14	22
C5		16	10.5	225	14	22
C6		16	9	220	12	19
D1	17-29	19	14	231	17	29
D2		16	14.5	295	18	29
D3		19	14	250	17	22
D4		16	14	288	19	29
D5		16	14	288	19	29
D6		25	15.9	360	19	29
D7		19	16	330	19	29

Part No.	Series	Product Dimensions			Application Range	
		Spring Width	Inner Diameter	Spring Tape Length	Minimum Diameter	Maximum Diameter
		(mm)	(mm)	(mm)	(mm)	(mm)
E1	23-37	16	17.5	375	23	37
E2		16	18	378	23	39
E3		25	21	550	25	37
E4		25	18	955	23	39
E5		16	17	370	24	37
E6		19	21	400	25	37
E7		20	16	680	22	35
F1	29-50	19	24	660	30	70
F2		16	25	505	31	50
F3		16	24	504	32	50
F4		20	24	530	30	50
F5		25	24.5	660	31	50
F6		20	22	930	29	47
G1	44-70	20	32	710	44	70
G2		20	32	791	44	70
G3		25	31.5	850	44	70
H1	55-94	20	60	900	55	H1
H2		20	44	935	58	92
H3		15	43	935	58	94
J1	60-135	25	44.5	1300	60	135

Dimensions can be customized.